



total possible material thickness between male and female part: 3mm
depends on way of assembly,
female part can be assembled from the backside

FIDLOCK®

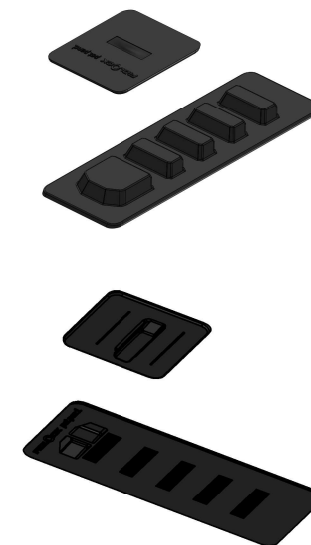

Product	Stripe X5 Flex
Opening	lifting
Material	TPU, NdFeB, Epoxy
Colour	black
Weight	11,7g
Load capacity	
General notes	stitchable, weldable, shore hardness: 85S



possible stitching area

Proceed like stitching zipper
Use a zipper presser foot and
stitch length 2-3 mm
(For securing the thread we
recommend choosing a position
next to the Fidlock part. Otherwise
stability could be reduced.)

Article No	01343-000002(BLK)
Scale	1:1
Date	24.04.2021
Author	SO

patented technology.